CST-P08 (PY-08-0)

Main Feature:

1. Socket with PCB terminal.
2. No reduction of protection class or creepage/clearance with plastic retainer.
3. Easy replacement of relays.
4. Socket can be used as connector for diagnosis function.
5. Sockets and accessories: RoHS compliance (Directive 2002/95/EC).

Socket with PCB-type terminals

Approvals:

cULus E306487

Technical data:

Rated current	7A
Rated voltage / max. Switching voltage AC	150/250 VAC
Dielectric strength coil-contact circuit	1,500 V_{rms}
Insulation resistance (at 500VDC)	100MΩ
Material group of insulation parts	≧IIIa
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	reinforced
Open contact circuit	functional
Rated insulation voltage	250V
Pollution degree	2
Rated voltage system	230/400V
Over voltage category	Ⅲ
RoHS Directive 2002/95/EC	
Sockets, retainers and marking tag:	compliant
Degree of protection DIN 40050	IP20
Ambient temperature range	-25...+55℃
Terminals	PCB
Insertion cycles	A (10)
Mounting distance	0, dense packing
Weight	7g
Packaging unit	100pcs.
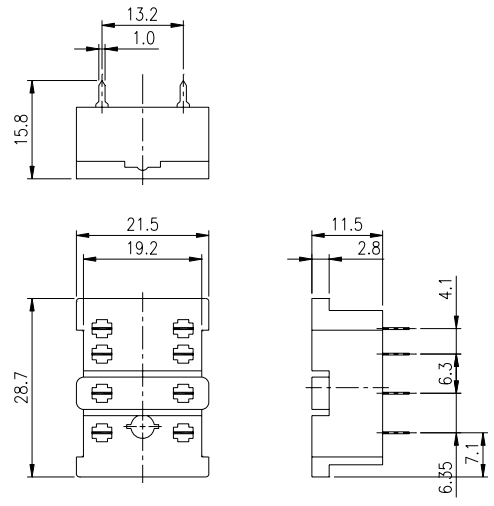
Dimension: