



## »» Features

- Compact size of 13.5mm for space saving.
- Socket and accessories for relay type 607 series.
- UL/CUL approvals.
- Flammability UL 94-V2.
- Comply with RoHS-Directive 2002/95/EC.

## »» Ordering Information

### ◆ Socket

<u>STN</u>	<u>607</u>	<u>    </u>
1	2	3

1. STN -- Socket type

2. 607 -- 607 series

3. Blank -- Double pole double throw  
(Pinning 5.0mm)

### ◆ Accessories

WP607 -- Writing plate for STN607 socket

## »» Specification


Rated current	2P : 2×12A 300VAC
Insulation resistance	1000 MΩ Min. (DC 500V)
Dielectric strength	Between open contact : 3000V , 50/60Hz 1 min.
	Between contact and coil : 5000V, 50/60Hz 1 min.
	Between contact circuits : 2000V, 50/60Hz 1 min.
Protection category	IP 20
Wire cross section	2×2.5 mm <sup>2</sup>
Ambient temperature	-40~+70°C (no freezing)
Weight	Approx. 46 g

## »» Safety Approval

Certified	UL / CUL
File No.	E98244

# STN607

## »» Outline Dimensions

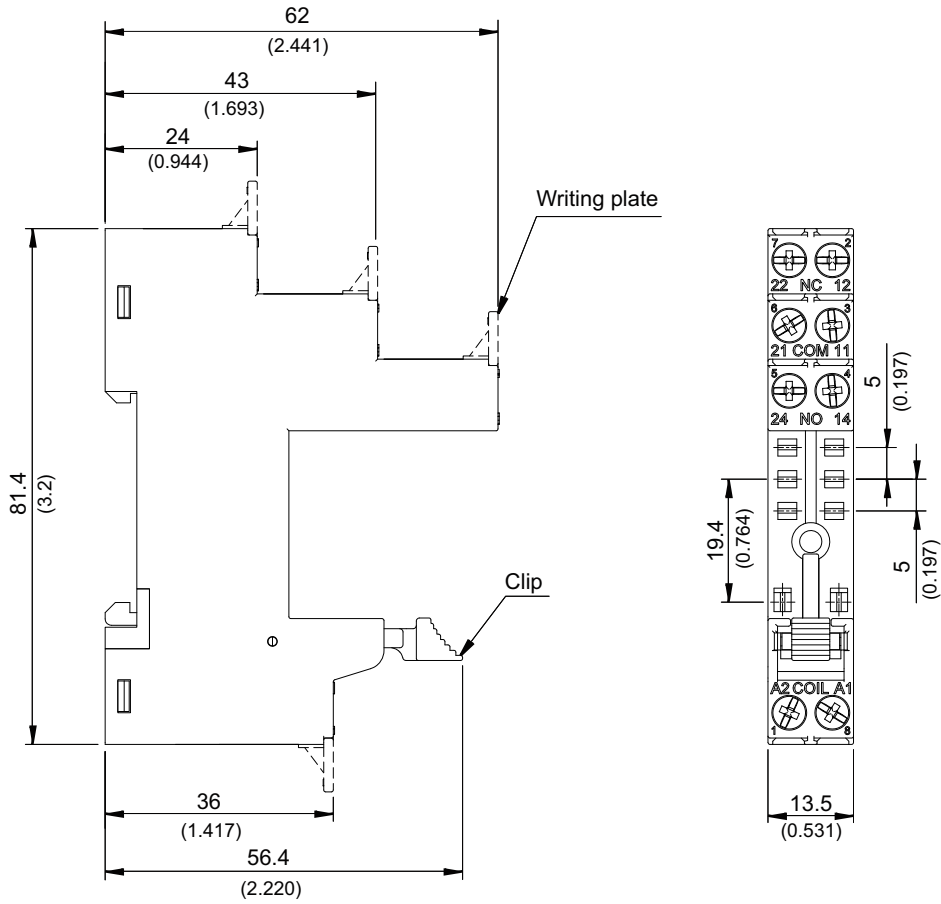

## »» Wiring Diagram

TOP VIEW

